

Cat.6 U-UTP Cable

Jacket: PVC, LSZH (Low Smoke Zero Halogen), Outdoor PE

Packaging: 66504:305M Reelex Box/ Reel in Box



Others: 305M/500M Wooden Reel



Part No	TP-UTP-C6
No. of Pairs	4
Cable Type	U-UTP
Conductor Size	23AWG
Core Dimension(mm)	0.97
Overall Dimension(mm)	6.1
NVP(%)	66

Standard Compliances

- ISO/IEC 11801:2011(Ed.2.2)
- IEC 61156-5:2009(Ed.2.0)
- EN 50173-1:2011
- EN 50173-2:2007 including amendment A1:2010
- ANSI/TIA-568-C.2:2009

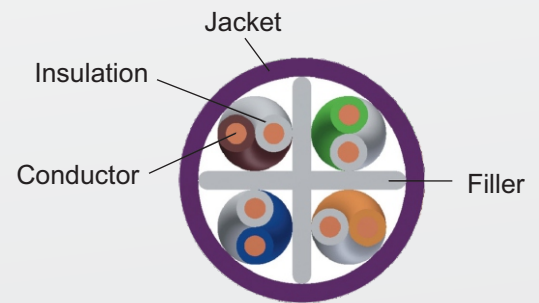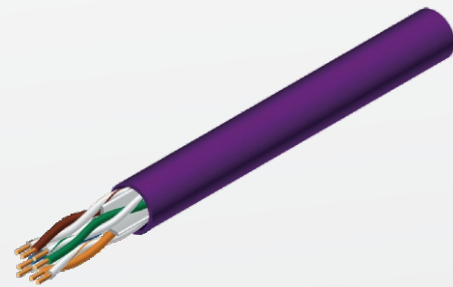

Features and Benefits

- Tape design engineered for smaller overall diameter and ease of installation
- Characterized and tested to 250MHz
- Positive PSACR up to 300MHz for future bandwidth requirements
- Unique product-specific packaging for ease of identification
- Every master reel is tested to ensure electrical performance compliance
- Print legend contains footage marking from 305M to 0M or 500M to 0M
- RoHS compliant
- UL Listed
- ETL / EC Verified



Applications

- IEEE 802.3: 1000BASE-T (Gigabit Ethernet), 100BASE-TX, 10BASE-T
- ANSI/TIA/EIA-854: 1000BASE-TX
- 155 Mb/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (POE)
- 4/16 Mb/s Token Ring
- Digital Video
- Broadband and Baseband Analog Video