

# Cat. 6A F-FTP Cable

**Jacket:** PVC,LSZH (Low Smoke Zero Halogen),Outdoor PE

**Packaging:** 305M/500M Wooden Reel


Part No	TP-FFTP-C6A
No. of Pairs	4
Cable Type	F-FTP
Conductor Size	23AWG
Core Dimension(mm)	1.32
Overall Dimension(mm)	7.59
NVP(%)	76.5

## Standard Compliances

- ISO/ IEC 11801:2011(Ed.2.2)
- IEC 61156-5:2009(Ed.2.0)
- EN 50173-1:2011
- EN 50173-2:2007 including amendment A1:2010
- ANSI/TIA-568-C.2:2009

## Features and Benefits

- Ideal solution for 10 Gigabit Ethernet
- Individual pair shielding or special designed filler to provide EMI protection
- Designed with shielding to offer maximum pair separation, increasing key electrical performance parameters
- Provides positive PSACR beyond 500MHz for higher available bandwidth
- Every master reel is tested to ensure electrical performance compliance
- Print legend contains footage marking from 305M to 0M or 500M to 0M
- Unique product-specific packaging for ease of identification
- RoHS compliant
- EC Verified

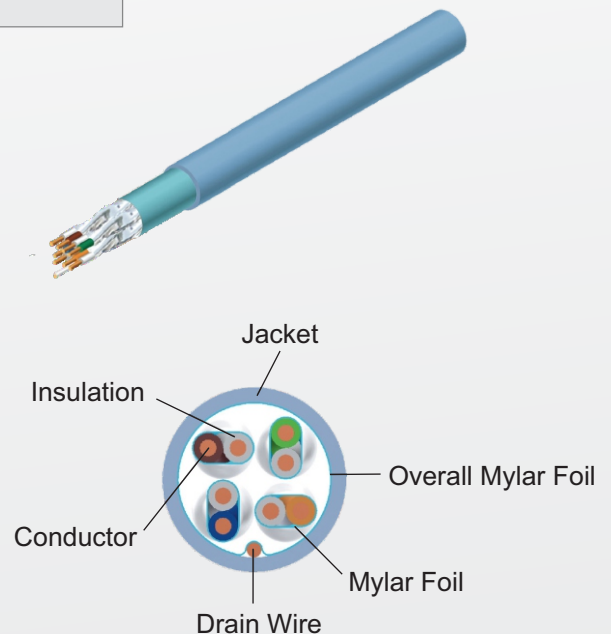

## Applications

- 2.4/1.2 Gb/s ATM
- IEEE 802.3an:10G BASE-T (10 Gigabit Ethernet) supporting 100 meters
- 3D imaging
- Digital Video
- Broadband and Baseband Analog Video

