


Bow-type drop cable

GJXTFH

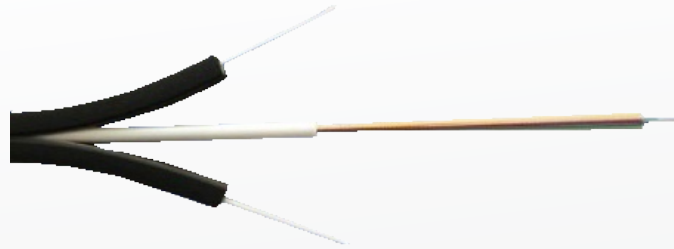


Application:

- Used as access building cable
- Used in indoor cabling especially used for FTTH

Description:

The optical fiber unit is positioned in the center ,two parallel fiber reinforced plastics FRP are placed at the two sides ,then the cable is completed with a black or color LSZH Sheath.

Cable Structure

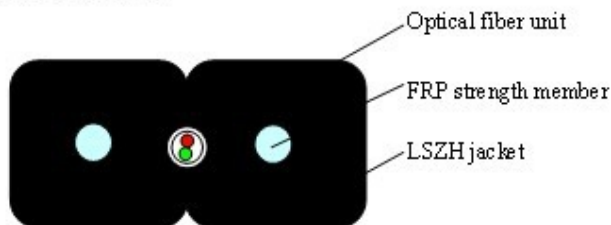

Technical Parameters

Cable Code	Fiber Count	Cable Size (mm)	Cable Weight (kg/km)	Tensile (N)		Crush (N/100mm)		Crush Resistance (mm)		Range of Temperature (°C)
				Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
TP-GJXTFH-01	1	3.0X4.0	15	40	80	500	1000	30D	15D	-20-60
TP-GJXTFH-02	2	3.0X4.0	17	40	80	500	1000	30D	15D	
TP-GJXTFH-04	4	4.1X6.1	20	40	80	500	1000	30D	15D	
TP-GJXTFH-06	6	4.1X6.1	30	45	85	500	1000	30D	15D	
TP-GJXTFH-08	8	4.1X6.1	32	50	90	500	1000	30D	15D	
TP-GJXTFH-12	12	4.1X6.1	35	55	95	500	1000	30D	15D	

Fiber Type	G652D	50/125	62.5/125	G657A1	G657A2	OM3-150	OM3-300	OM4
Jacket Material	PVC		LSZH					

Characteristics:

- ◆ Special low bend sensitivity fiber provides high bandwidth
- ◆ Two parallel FRP strength members ensure good performance of crush resistance to protect the fiber
- ◆ Simple structure light weight and high practicability
- ◆ Low smoke zero halogen and flame retardant sheath