

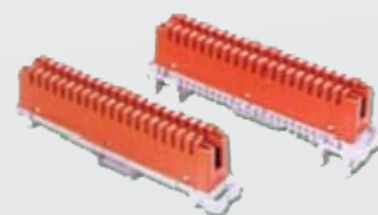



Connection & Disconnection Modules

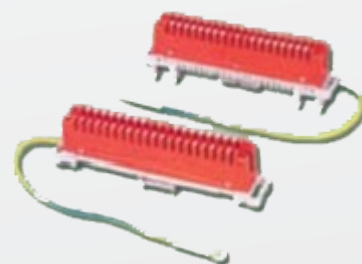

Type	Description
T-1001A	10 Pairs disconnection module (PBT)
T-1001A	10 Pairs disconnection module (ABS)
T-1002A	10 Pairs connection module (PBT)
T-1002A	10 Pairs connection module (ABS)
T-1003A	10 Pairs disconnection module - Yellow Color
T-1003B	10 Pairs disconnection module - Orange Color
T-1006A	10 Pairs profile disconnection module
T-1006B	10 Pairs profile connection module
T-1008A	10 Pairs highband module
T-1009A	10 Pairs switch module
T-1009B	10 Pairs switch module (Profile type)
T-1010A	10 Pairs earth module
T-1010B	10 Pairs earth module (Profile type)
T-1011A	10 Pairs disconnection module with wire guide
T-1011B	10 Pairs connection module with wire guide



Disconnection Module

Two piece contacts normally closed, incorporating a disconnection facility.

Diameter of wire conductor: 0.4mm - 0.7mm

Insulation diameter of wire: 0.7mm - 1.4mm

Contact silver plating thickness: 20u" - 200u"

Housing color optional

Connection Module

One piece contact providing continuous link between permanent wire & jumper wire.

Diameter of wire conductor : 0.4mm - 0.7mm

Insulation diameter of wire : 0.7mm - 1.4mm

Contact Silver plating thickness: 20u" - 200u"

Housing color optional

Profile Connection & Disconnection Module

Profile module snaps on to rod of rack mounting frame or standard back mounting frame.

Switching Module

Normally open contact to allow pole bridging plugs, testing leads, or patch cords.

Earth Module

Provide a common ground point for shielded cable drain wires, allow for an isolated ground connection