



# Surface Mount Box

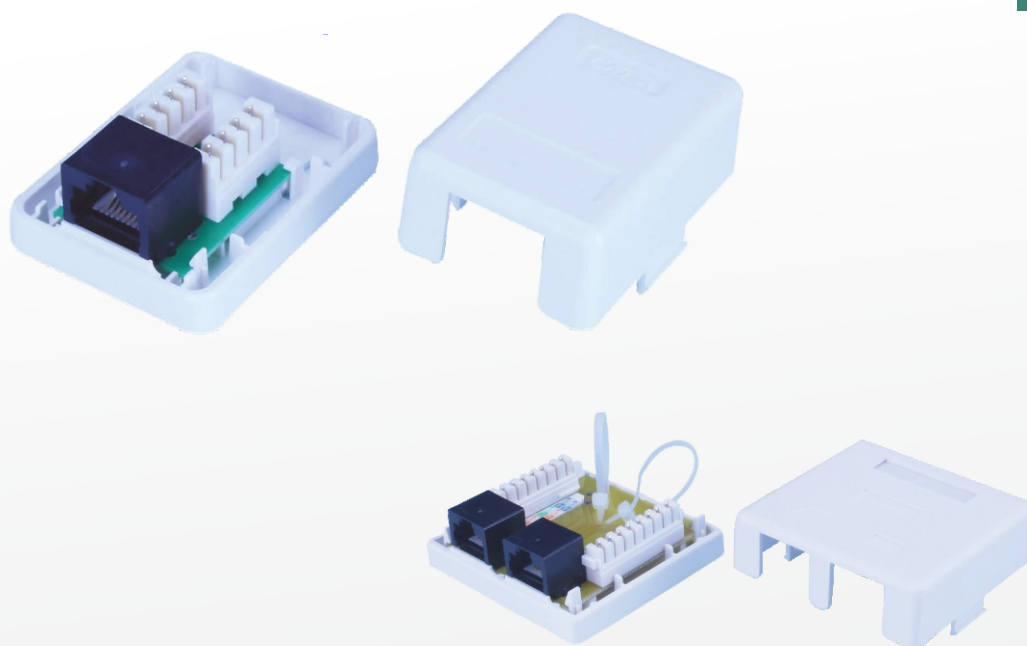

## Specification:

- Meet EIA/TIA 568B standard
- Accept 22-26 AWG solid wire
- Dual type terminal block accepts both Krone & 110 (AT&T) punch down tools
- Material: ABS UL-94V0
- 8P8C 50 micron gold plated
- RoHS compliant

Part No	Description	Port
TPESBA-U1X00	Cat.5e unshielded	1
TPESBA-U2X00	Cat.5e unshielded	2
TP6SBA-U1X00	Cat.6 unshielded	1
TP6SBA-U2X00	Cat.6 unshielded	2
TPESBA-U1X06	Cat.5e unshielded, 6U	1
TPESBA-U2X06	Cat.5e unshielded, 6U	2
TP6SBA-U1X06	Cat.6 unshielded, 6U	1
TP6SBA-U2X06	Cat.6 unshielded, 6U	2

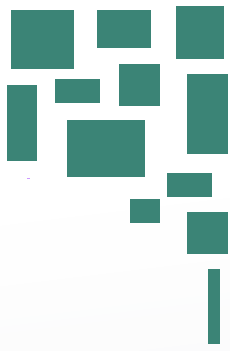

<b>Part No</b>	<b>Description</b>	<b>Port</b>
TPESBA-S1X00	Cat.5e shielded	1
TPESBA-S2X00	Cat.5e unshielded	2
TP6SBA-S1X00	Cat.6 shielded	1
TP6SBA-S2X00	Cat.6 shielded	2
TPESBA-S1X06	Cat.5e shielded, 6U	1
TPESBA-S2X06	Cat.5e shielded, 6U	2
TP6SBA-S1X06	Cat.6 shielded, 6U	1
TP6SBA-S2X06	Cat.6 shielded, 6U	2

<b>Box Color</b>	<b>No.</b>
white	WH
ivory	IV