

LC Type Pigtail



Applications

- Telecommunication Networks
- CATV Networks
- Active Device Termination
- Local Area Networks

Features and Benefits


- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards.
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- Optical performance 100% factory tested



Specification

| Characteristics | Conditions | Values |
|-----------------------|-----------------------------|---------|
| Insertion Loss | Against Reference Connector | < 0.2dB |
| Return Loss | PC | > 45dB |
| | UPC | > 55dB |
| | APC | > 65dB |
| Durability | 1000times | < 0.2dB |
| Impact | 1.5mm drop, 8 times | < 0.2dB |
| Operating temperature | -20°C+70°C | |
| Cable outer diameter | 900um, 1.6mm, 2.0mm, 3.0mm | |

Ordering Information

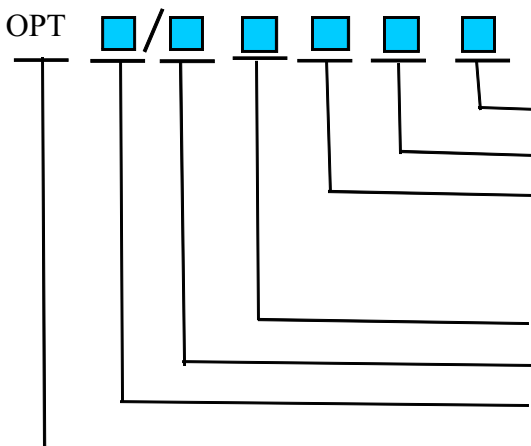

- Cord Diameter: 0.9mm, 1.6mm, 2.0mm, 3.0mm
- Cord Type S: simplex; D: duplex
- Fiber SM: Singlemode(9/125um yellow)
- MM: Multimode(50/125um orange)
- OM3: Multimode(OM3 Aqua)
- Length: 1~99m
- Polishing Grass (PC, UPC, APC)
- Connector: LC
- Optical Pigtail