

ST Type Pigtail



Applications

- Telecommunication Networks
- CATV Networks
- Active Device Termination
- Local Area Networks

Features and Benefits


- Compliant with: ANSI, Bellcore, TIA/EIA, IEC Standards.
- Low Insertion Loss and High Return Loss
- Excellent Repeatability and Changeability
- Simplex and Duplex Available
- With Ceramic Ferrules
- Optical performance 100% factory tested



Specification

							Values
Characteristics	Conditions						< 0.2dB
Insertion Loss	Against Reference Connector						> 45dB
Return Loss	PC						> 55dB
	UPC						> 65dB
	APC						< 0.2dB
Durability	1000times						< 0.2dB
Impact	1.5mm drop, 8 times						
Operating temperature	-20°C+70°C						
Cable outer diameter	900um, 1.6mm, 2.0mm, 3.0mm						

Ordering Information

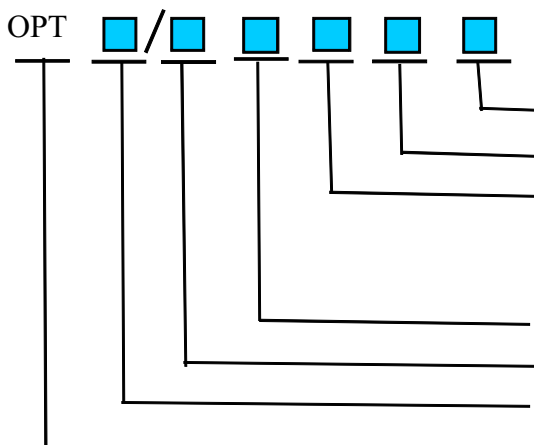

- Cord Diameter: 0.9mm, 1.6mm, 2.0mm, 3.0mm
- Cord Type S: simplex; D: duplex
- Fiber SM: Singlemode(9/125um yellow)
- MM: Multimode(50/125um orange)
- MM: Multimode(62.5/125um orange)
- Length: 1~99m
- Polishing Grass (PC, UPC, APC)
- Connector: ST
- Optical Pigtail