

Outdoor Jelly Filled Multi Pair Cable


TE-20P-OUT-J - Telephone Cable - 20pair - Outdoor

Description

24AWG Solid-Bare Copper conductor, HDPE insulation, 20 pairs, APL,non-corrugated Aluminium tape Moistureproof belt, Core waterblocking Grease Filling, Wrapped with one polyester tape and one Water Blocking Swellable tape, LDPE jacket

Design

Structure:

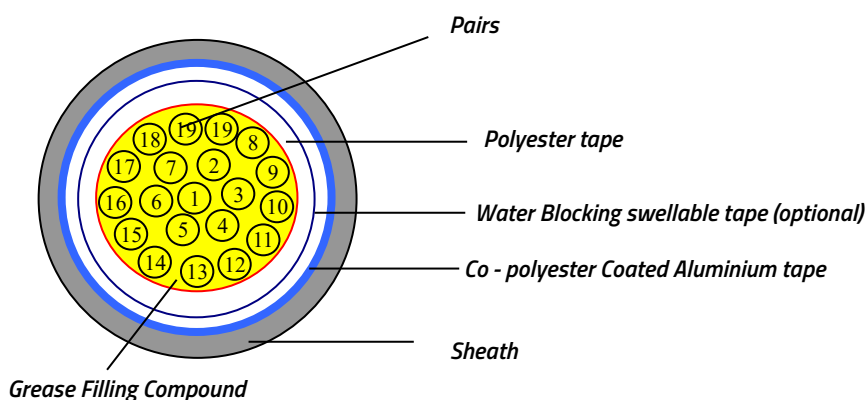

1+6+13

Conductor	: 0.500mm Solid-bare copper wire (24AWG)
Insulation	: HDPE OD:1.05mm (nom.)
Twisting	: 2 wires twisted
Color	: 1. White-blue 2. White-Orange 3. White-Green 4. White-brown 5. White-grey 6. Red-blue 7. Red-orange 8. Red-green 9. Red-brown 10. Red-grey 11. Black-blue 12. Black-Orange 13. Black-Green 14. Black-brown 15. Black-grey 16. Yellow-blue 17. Yellow-orange 18. Yellow-green 19. Yellow-brown 20. Yellow-grey
Cabling	: 20P, 1+6+13
Filling	: Core waterblocking Grease
Wrapping	: Wrapped with one polyester tape and one Water Blocking Swellable tape
Moistureproof belt	: Total thickness of 0.25mm APL,non-corrugated Aluminium tape
Jacket	: LDPE Color: Black Nom. Thickness: 1.4mm Nom. OD: 13.4mm

Outdoor Jelly Filled Multi Pair Cable

TE-20P-OUT-J - Telephone Cable - 20pair - Outdoor

Electrical Characteristics (20 °C)

Conductor DC resistance	: $\leq 98 \text{ohm/km}$
Imbalance of Direct Current Resistance to pair	: $\leq 5.0\%$
Insulation resistance of each single insulated conductor to other conductors shield DC 500V	: $> 3000 \text{M}\Omega \cdot \text{km}$
Working Capacitance (800Hz/1KHz)	: 10 pairs $\leq 58 \text{nF/km}$ 10 pairs $\leq 57 \text{nF/km}$
Pair to pair capacitance unbalance (800Hz/1KHz)	: $\leq 250 \text{pF/km}$
Electrical Strength DC	
Sustainable Time	: 1min
Between conductor and conductor	: 1KV
Between conductor and shield	: 3KV

Other Characteristics

Before Aging:

Tensile Strength (Mpa)	: ≥ 10.0
Elongation (%)	: ≥ 350

Aging Period ($^{\circ}\text{C} \times \text{hrs}$) : $100^{\circ}\text{C} \times 24\text{h} \times 7\text{d}$ (Retention rate)

After Aging: Elongation (%) : ≥ 300

This cable meets RoHS requirements