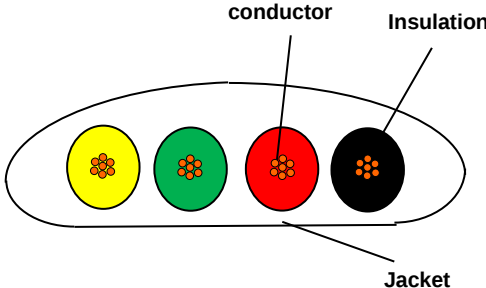


Telephone Cable

4 Core PVC Sheath

G1209-001

Type	Telephone Cable 4C 7*0.12				
Sheath Printing	TBD				
Conductor	Material	Stranded-Bare Copper			
	dimension.(mm)	28AWG(7/0.12)			
Insulation	Material	HDPE			
	O.D.	0.96±0.05mm			
Color	1、Yellow	2、Green	3、Red	4、Black	Technical Performance : DC Resistance 20℃ (Ω/100m) max23.7 DC Conductor Resistance Unbalance (%)max5.0
Jacket	thickness	0.62±0.05 mm			
	Diameter	(2.5/5.0)±0.4mm			
	Surface	Clean,Frap,Satiation			
	Material	PVC(complies RoHS)			
	Color	TBD			
Marking	Height	3.0±0.3mm			
	Color	Black			
	Print error & Space	≤±0.5%, 1m			
Carton size	According to the requires				
Length	100m roll				
Rip code	No	Drain wire	No		
Insulation Physical Properties	Before Aging	Tensile Strength (Mpa)	≥16		
		Elongation (%)	≥300		
Sheath Physical Properties	Before Aging	Tensile Strength (Mpa)	≥13.5		
		Elongation (%)	≥150		
	Aging Period (℃×hrs)		100℃×24h×7d		
	After Aging	Tensile Strength (Mpa)	≥12.5		
		Elongation (%)	≥125		
Cold bend (-20±2℃×4h) 15times cable O.D. No visible cracks					

Technical Performance :

DC Resistance 20°C (Ω/100m) max 23.7

DC Conductor Resistance Unbalance (%)max 5.0